

Cleaneo Akustik Blocklochung

Design B4/B5/B6



- D Cleaneo Akustik Platte
- GB Apertura
Perforated Plasterboard
- F Cleaneo
Design des plaques acoustiques
- I Cleaneo
Design dei pannelli acustici
- E Cleaneo
Placas Acústicas de diseño

Blocklochung
Slotted Perforation slotline
Perforations rondes
Perforazione a blocchi
En bloque slotline

8/18 R; 12/25 R; 12/25 Q

Lochbild, Perforation type
 Disposition des perforations
 Tipo di foratura, Tipo de perforación

	8/18 R	12/25 R	12/25 Q
B4:	12,1 %	11,3 %	14,4 %
B5:	9,1 %	6,2 %	7,8 %
B6:	12,9 %	12,8 %	16,3 %

Lochflächenanteil, Ratio of perforation
 Taux de perforation, Percentuale della superficie forata, % de perforación

1200 mm, 1224 mm

Standardbreite, Standard width,
 Largeur standard, Larghezza standard,
 Ancho standard

2400 mm, 2448 mm

Standardlänge, Standard length
 Longueur standard, Lunghezza standard
 Longitud standard


12,5 mm

Plattendicke, Board thickness
 Epaisseur des plaques,
 Spessore delle lastre, Espesores


ca. 9,0 kg/m²

Gewicht, Weight, Poids, Peso

Maßstab, Scala, Echelle,
 Scala, Escala **1:1**

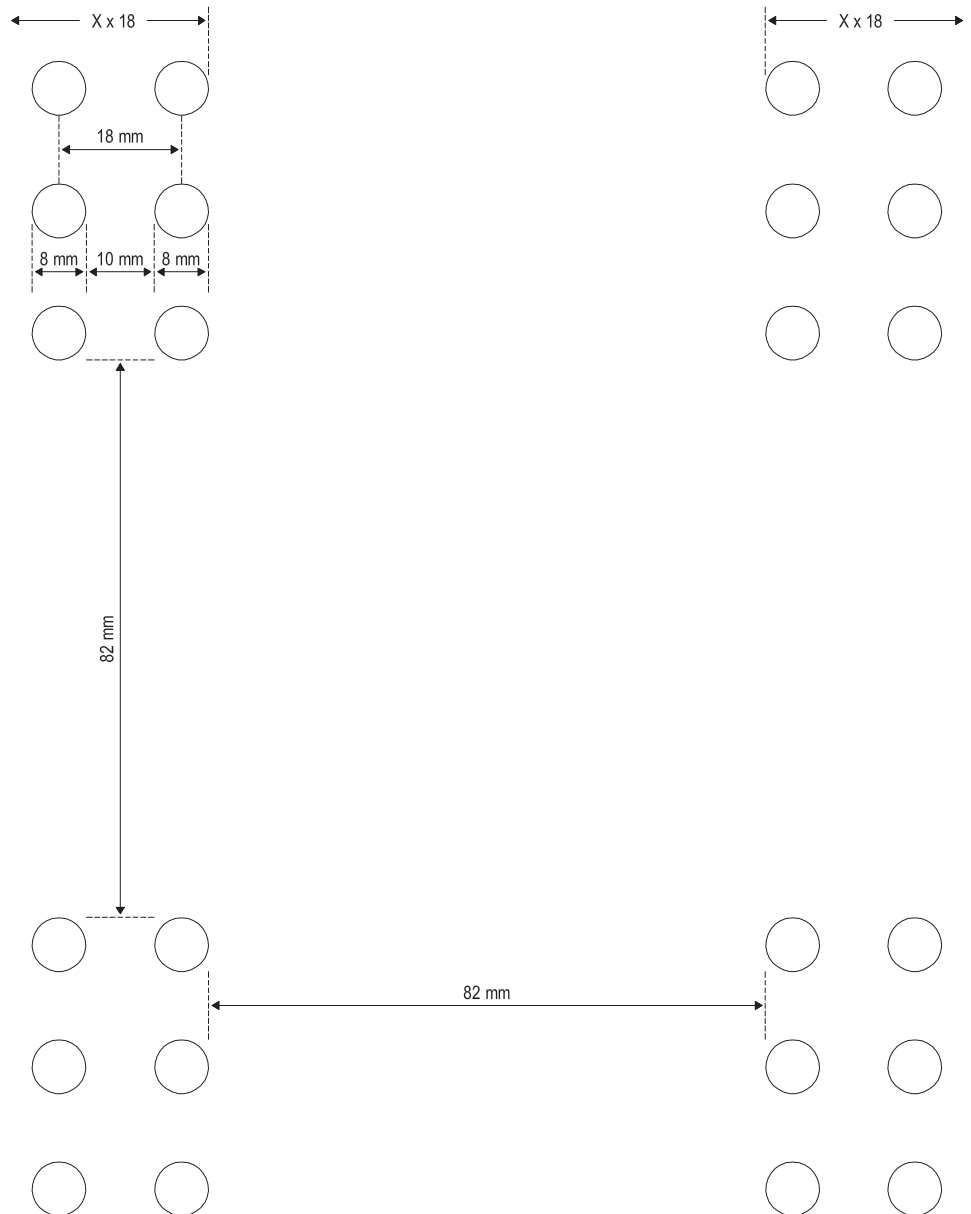

Design B4



Design B5



Design B6

